Deutsches Institut für Bautechnik

Public-law institution jointly founded by the federal states and the Federation

European Technical Assessment Body for construction products

Member of EOTA
www.eota.eu

Designated according to Article 29 of Regulation (EU) No 305/2011 and member of EOTA (European Organisation for Technical Assessment)

European Technical Assessment ETA-23/1010 of 19 August 2024

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:	Deutsches Institut für Bautechnik
Trade name of the construction product	Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection
Product family to which the construction product belongs	Post-installed reinforcing bar (rebar) connection with improved bond-splitting behaviour under static loading
Manufacturer	EJOT SE & Co. KG Market Unit Construction In der Stockwiese 35 57334 Bad Laasphe GERMANY
Manufacturing plant	EJOT Herstellwerk 24
This European Technical Assessment contains	19 pages including 3 annexes which form an integral part of this assessment.
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of	EAD 332402-00-0601, Edition 09/2023

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection in accordance with the regulations for reinforced concrete construction.

Reinforcing bars with a diameter ϕ from 8 to 40 mm according to Annex A and the injection mortar EJOT MULTIFIX SE1000 SEISMIC / Sormat ITH-EPOXe+ are used for the post-installed rebar connection. The rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between embedded reinforcing bar, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the rebar connection is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connections of at least 50 and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 to C 3
Characteristic resistance to tension load (seismic loading)	No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 332402-00-0601, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 19 August 2024 by Deutsches Institut für Bautechnik

Beatrix Wittstock
Head of Section

beglaubigt:
Baderschneider

Installation condition and application example

Figure A1: Column / wall to foundation / slab

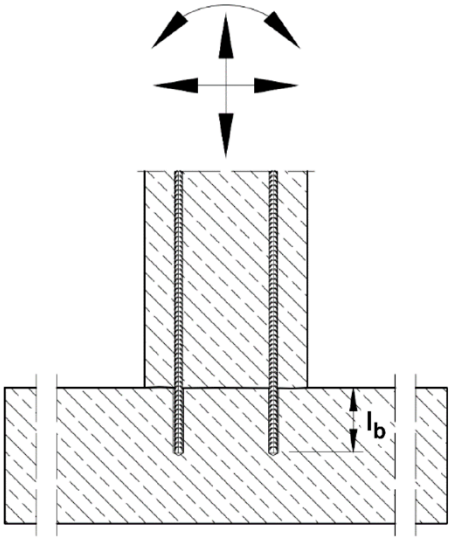

Figure A2: Slab / beam to wall or beam to column

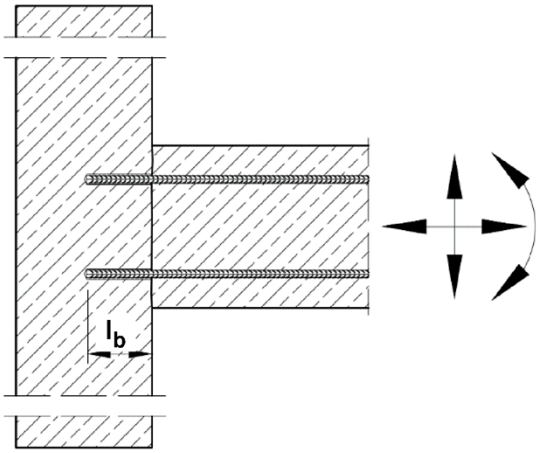

l_b = Embedment length

The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex A 1**
Product description Installed condition and examples of use for rebars	

Deutsches Institut für Bautechnik DIBt

Cartridge system

Side-by-Side Cartridge:
440 ml, 585 ml and 1400 ml

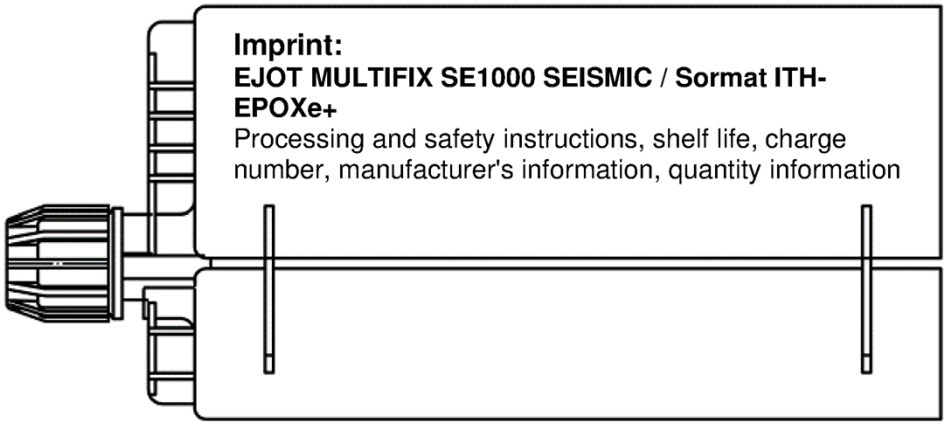

Static mixer PM-19E

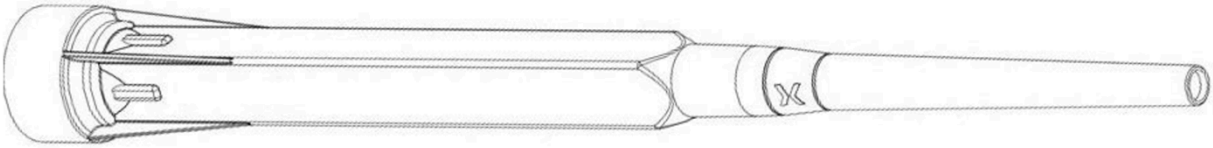

Piston plug VS and mixer extension VL

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	Annex A 2
Product description Injection system	

Deutsches Institut für Bautechnik DIBt

Reinforcing bar (rebar): ø8 up to ø40

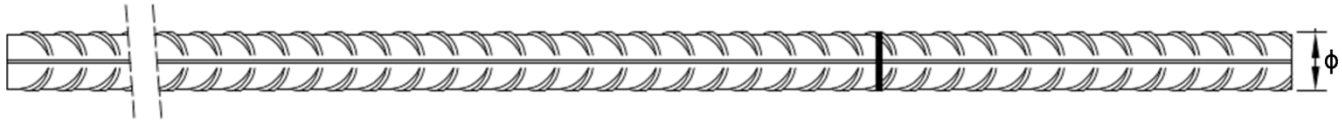

- Minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range $0{,}05\phi \le h_{rib} \le 0{,}07\phi$
  (ϕ: Nominal diameter of the bar; h_{rib}: Rib height of the bar)

Table A1: Materials Rebar

Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCI of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex A 3**
Product description Specifications Rebar	

Deutsches Institut für Bautechnik DIBt

Specification of the intended use

Anchorages subject to:		Working life 50 years	Working life 100 years
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit CD: Compressed air drilling DD: Diamond drilling	static and quasi-static loads	Ø8 to Ø40	Ø8 to Ø40
Temperature Range:	I: - 40°C to +40°C (max long-term temperature +24 °C and max short-term temperature +40 °C) II: - 40°C to +72°C (max long-term temperature +50 °C and max short-term temperature +72 °C)		

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013 + A2:2021.
- Strength classes C20/25 to C50/60 according to EN 206:2013 + A12:2021.
- Maximum chloride content of 0,40% (CL 0.40) related to the cement content according to EN 206:2013 + A2:2021.
- Non-carbonated concrete.

  Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of ϕ + 60 mm prior to the installation of the new rebar.

  The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010. The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EOTA Technical Report TR 069, Edition June 2021.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

Installation:

- Dry or wet concrete; for all drilling methods and all diameter.
- Water-filled drill holes; for rebar Ø8 to Ø32 only.
- Overhead installation allowed.
- Hole drilling by hammer drill (HD), hollow drill (HDB), diamond drill (DD) or compressed air drill mode (CD).
- Rebar installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component).

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 1**
Intended use Specifications	

Deutsches Institut für Bautechnik DIBt

Table B1: Minimum concrete cover c_{min} of post-installed rebar depending of drilling method

Drilling method	Rebar diameter	Without drilling aid	With drilling aid	
HD: Hammer drilling HDB: Hammer drilling with hollow drill bit	< 25 mm	30 mm + 0,06 · l_b ≥ 2 ϕ	30 mm + 0,02 · l_b ≥ 2 ϕ	
	≥ 25 mm	40 mm + 0,06 · l_b ≥ 2 ϕ	40 mm + 0,02 · l_b ≥ 2 ϕ	
DD: Diamond drilling	< 25 mm	Drill rig used as drilling aid	30 mm + 0,02 · l_b ≥ 2 ϕ	
	≥ 25 mm		40 mm + 0,02 · l_b ≥ 2 ϕ	
CD: Compressed air drilling	< 25 mm	50 mm + 0,08 · l_b	50 mm + 0,02 · l_b	
	≥ 25 mm	60 mm + 0,08 · l_b ≥ 2 ϕ	60 mm + 0,02 · l_b ≥ 2 ϕ	

Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed.
The minimum clear spacing is a = max (40mm; 4 ϕ)

Table B2: Dispensing tools

Cartridge type/size	Hand tool		Pneumatic tool
Side-by-side cartridges 440, 585 ml	 e.g. SA 296C585	 e.g. Type H 244 C	 e.g. Type TS 444 KX
Side-by-side cartridges 1400 ml	-	-	 e.g. Type TS 471

All cartridges could also be extruded by a battery tool.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection

Intended use
Minimum concrete cover
Dispensing tools

Annex B 2

Deutsches Institut für Bautechnik DIBt

Table B3: Brushes, piston plugs, max embedment length and mixer extension, hammer (HD), diamond (DD) and compressed air (CD) drilling

Bar size ϕ	Drill bit - Ø			d_b Brush - Ø		$d_{b,min}$ min. Brush - Ø	Piston plug	Cartridge: 440 ml or 585 ml				Cartridge: 1400 ml	
								Hand or battery tool		Pneumatic tool		Pneumatic tool	
	HD	DD	CD					$l_{b,max}$	Mixer extension	$l_{b,max}$	Mixer extension	$l_{b,max}$	Mixer extension
[mm]	[mm]				[mm]	[mm]		[mm]		[mm]		[mm]	
8	10			RB10	11,5	10,5	-	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8
10	12		-	RB12	13,5	12,5	-	700		800		800	
								250		250		250	
12	14		-	RB14	15,5	14,5	VS14	700		1000		1000	
								250		250		250	
	16			RB16	17,5	16,5	VS16	700		1300		1200	VL16/1,8
14	18			RB18	20,0	18,5	VS18					1400	
16	20			RB20	22,0	20,5	VS20					1600	
20	25		-	RB25	27,0	25,5	VS25	500		1000		2000	
	-		26	RB26	28,0	26,5	VS25						
22	28			RB28	30,0	28,5	VS28						
24/25	30			RB30	32,0	30,5	VS30						
	32			RB32	34,0	32,5	VS32						
28	35			RB35	37,0	35,5	VS35						
32/34	40			RB40	43,5	40,5	VS40						
36	45			RB45	47,0	45,5	VS45	-	-				
40	-	52	-	RB52	54,0	52,5	VS52						
	55	-	55	RB55	58,0	55,5	VS55						

Table B4: Brushes, piston plugs, max embedment length and mixer extension, hammer drilling with hollow drill bit system (HDB)

Bar size ϕ	Drill bit - Ø	d_b Brush - Ø	$d_{b,min}$ min. Brush - Ø	Piston plug	Cartridge: 440 ml or 585 ml				Cartridge: 1400 ml	
					Hand or battery tool		Pneumatic tool		Pneumatic tool	
	HDB				$l_{b,max}$	Mixer extension	$l_{b,max}$	Mixer extension	$l_{b,max}$	Mixer extension
[mm]	[mm]				[mm]		[mm]		[mm]	
8	10	No cleaning Required		-	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8	250	VL10/0,75 or VL16/1,8
	12			-	700		800		800	
10					250		250		250	
	14			VS14	700		1000		1000	
12					250		250		250	
	16			VS16	700		1000		1000	
14	18			VS18						
16	20			VS20						
20	25			VS25	500					
22	28			VS28						
24/25	30			VS30						
	32			VS32						
28	35			VS35						
32/34	40			VS40						

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection

Intended use
Parameter brushes, piston plugs, max embedment length and mixer extension

Annex B 3

Deutsches Institut für Bautechnik DIBt

Cleaning and installation tools

HDB – Hollow drill bit system

The hollow drill system consists of Heller Duster Expert hollow drill bit and a class M vacuum cleaner with a minimum negative pressure of 253 hPa and a flow rate of minimum 150 m³/h (42 l/s).

Hand pump
(Volume 750 ml, $h_0 \leq 10\ d_s$, $d_0 \leq 20$mm)

Compressed air tool
(min 6 bar)

Brush RB



Piston Plug VS



Brush extension RBL

Table B5: Working time and curing time

Temperature in base material			Maximum working time	Initial curing time[1)]	Minimum curing time[2)]
T			t_{work}	$t_{cure,ini}$	t_{cure}
0 °C	up to	+ 4 °C	80 min	30 h	144 h
+ 5 °C	up to	+ 9 °C	80 min	20 h	48 h
+ 10 °C	up to	+ 14 °C	60 min	15 h	28 h
+ 15 °C	up to	+ 19 °C	40 min	9 h	18 h
+ 20 °C	up to	+ 24 °C	30 min	6 h	12 h
+ 25 °C	up to	+ 34 °C	12 min	4 h	9 h
+ 35 °C	up to	+ 39 °C	8 min	3 h	6 h
+40°C			8 min	1,5 h	4 h
Cartridge temperature			+5°C up to +40°C		

1) After Initial curing time has elapsed, the installation of the connecting reinforcement and the construction of the formwork can be continued

2) The minimum curing time is only valid for dry base material.
In wet base material the curing time must be doubled.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 4**
Intended use Cleaning and installation tools Working time and curing time	

Deutsches Institut für Bautechnik DIBt

Installation instructions

Attention: Before drilling, remove carbonated concrete and clean contact areas (see Annex B 1)
In case of aborted drill hole: the drill hole shall be filled with mortar.

Drilling of the bore hole

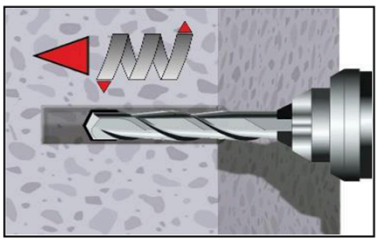

1a. **Hammer drilling (HD) / Compressed air drilling (CD)**
Drill a hole to the required embedment length.
Drill bit diameter according to Table B3.
Proceed with Step 2 (MAC or CAC).

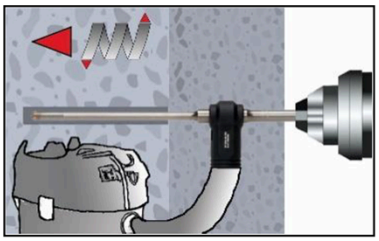

1b. **Hollow drill bit system (HDB) (see Annex B 4)**
Drill a hole to the required embedment length.
Drill bit diameter according to Table B4.
The hollow drilling system removes the dust and cleans the bore hole.
Proceed with Step 3.

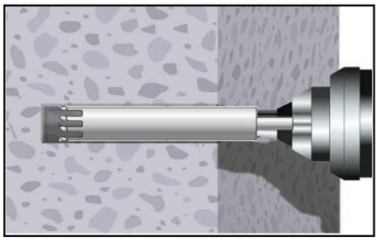

1c. **Diamond drilling (DD)**
Drill a hole to the required embedment length required
Drill bit diameter according to Table B3.
Proceed with Step 2 (SPCAC).

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 5**
Intended use Installation instruction	

Installation instructions (continuation)

Manual Air Cleaning (MAC)
for drill hole diameter $d_0 \leq 20$mm and drill hole depth $h_0 \leq 10\phi$ with drilling method HD/CD

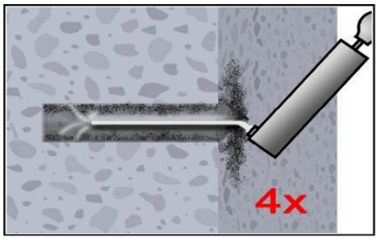

Attention! Standing water in the bore hole must be removed before cleaning.

2a. Blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 4).

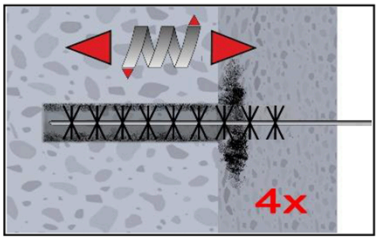

2b. Brush the bore hole minimum 4x with brush RB according to Table B3 over the entire embedment depth in a twisting motion (if necessary, use a brush extension RBL).

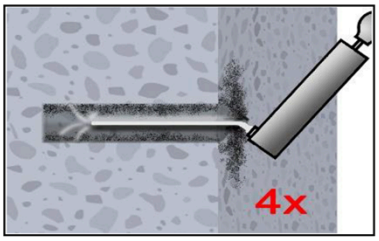

2c. Finally blow the bore hole clean minimum 4x from the bottom or back by hand pump (Annex B 4).

Compressed Air Cleaning (CAC):
All diameter with drilling method HD/CD

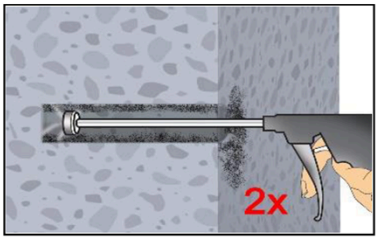

Attention! Standing water in the bore hole must be removed before cleaning.

2a. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar, oil-free) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

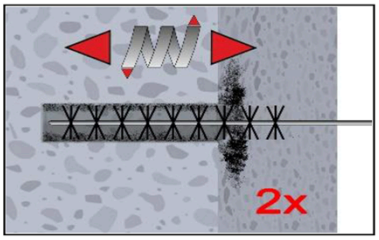

2b. Brush the bore hole minimum 2x with brush RB according to Table B3 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

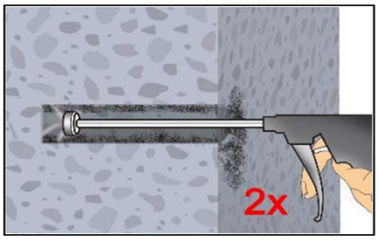

2c. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar, oil-free) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

Protect cleaned bore hole against re-contamination in an appropriate way. If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 6**
Intended use Installation instructions (continuation)	

Deutsches Institut für Bautechnik DIBt

Installation instructions (continuation)

Flush & Compressed Air Cleaning (SPCAC):
All diameter with drilling method DD

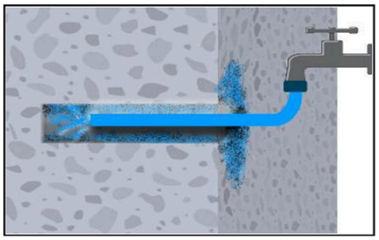

2a. Flushing with water until clear water comes out.

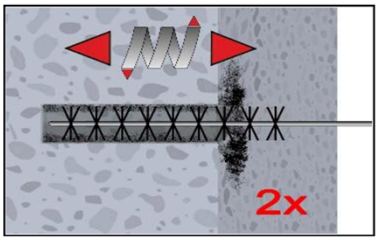

2b. Brush the bore hole minimum 2x with brush RB according to Table B3 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

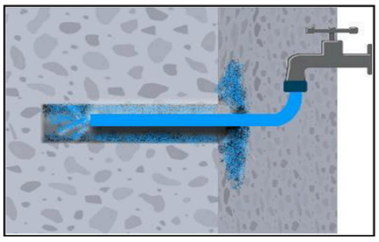

2c. Flushing again with water until clear water comes out.

Attention! Standing water in the bore hole must be removed before proceeding.

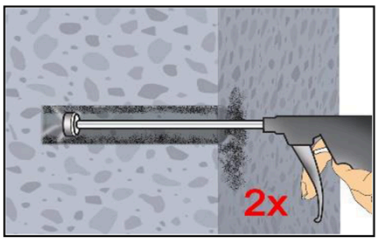

2d. Blow the bore hole clean minimum 2x with compressed air (min. 6 bar, oil-free) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

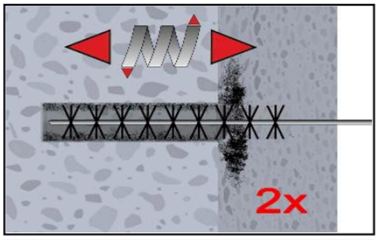

2e. Brush the bore hole minimum 2x with brush RB according to Table B3 over the entire embedment depth in a twisting motion. (If necessary, a brush extension RBL shall be used.)

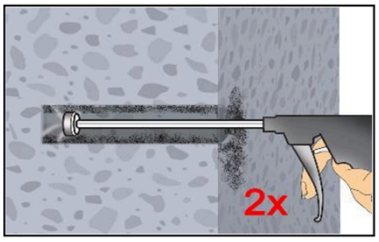

2f. Finally blow the bore hole clean minimum 2x with compressed air (min. 6 bar, oil-free) (Annex B 4) over the entire embedment depth until return air stream is free of noticeable dust. (If necessary, an extension shall be used.)

Protect cleaned bore hole against re-contamination in an appropriate way. If necessary, repeat cleaning process directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 7**
Intended use Installation instructions (continuation)	

Deutsches Institut für Bautechnik DIBt

Installation instructions (continuation)

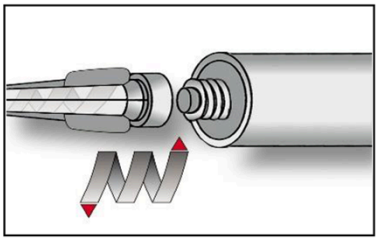

3. Screw on static-mixing nozzle PM-19E, and load the cartridge into an appropriate dispensing tool.
For every working interruption longer than the maximum working time t_{work} (Annex B 4) as well as for new cartridges, a new static-mixer shall be used.

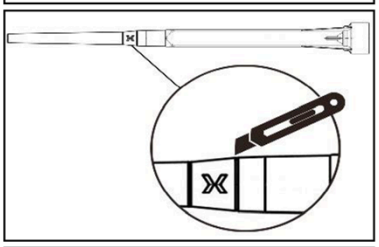

3a. In case of using the mixer extension VL16/1,8, cut off the tip of the mixer nozzle at position „X“.

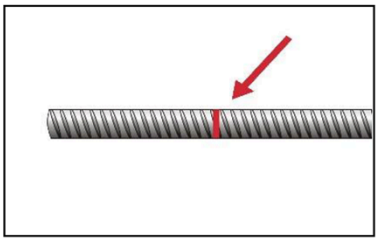

4. Mark embedment length l_b on the reinforcing bar .
The reinforcing bar shall be free of dirt, grease, oil or other foreign material.

5. Mark mixer nozzle and extension with mortar level mark l_m and embedment length l_b

Quick estimation: $l_m = 1/3 \cdot l_b$

Optimum mortar volume:

$$l_m = l_b \cdot \left(1{,}2 \cdot \frac{\phi^2}{d_0^2} - 0{,}2 \right)$$

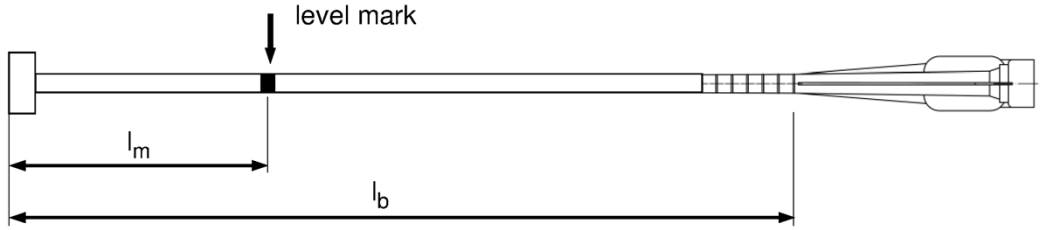

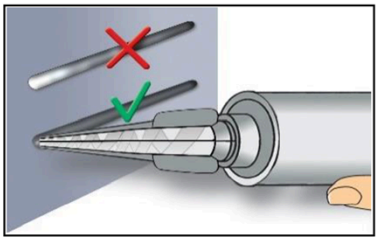

6. Not proper mixed mortar is not sufficient for fastening.
Dispense and discard mortar until an uniform grey or red colour is shown (at least 3 full strokes).

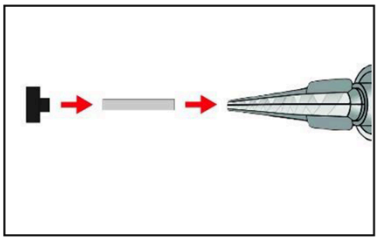

7. Piston plugs VS and mixer nozzle extensions VL shall be used according to Table B3 or B4.
Assemble mixing nozzle, mixer extension and piston plug before injecting mortar.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 8**
Intended use Installation instructions (continuation)	

Deutsches Institut für Bautechnik DIBt

Installation instructions (continuation)

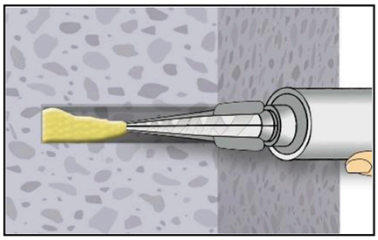

8a. **Injecting mortar without piston plug VS:**
Starting at bottom of the hole and fill the hole with adhesive until the mortar level mark is visible. (If necessary, a mixer nozzle extension shall be used.)
Slowly withdraw of the static mixing nozzle avoid creating air pockets
Observe the temperature related working time t_{work} (Annex B 4).

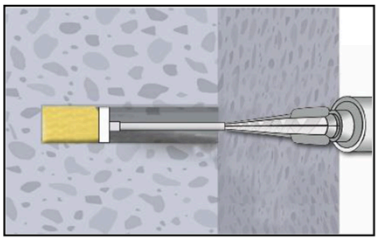

8b. **Injecting mortar with piston plug VS:**
Insert piston plug to bottom of the hole and fill the hole with mortar until mortar level mark l_m is visible. (If necessary, a mixer nozzle extension shall be used.)
During injection the piston plug is pushed out of the bore hole by the back pressure of the mortar.
Observe the temperature related working time t_{work} (Annex B 4).

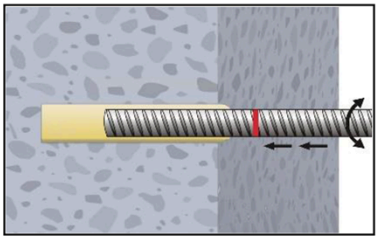

9. Insert the reinforcing bar while turning slightly up to the embedment mark.

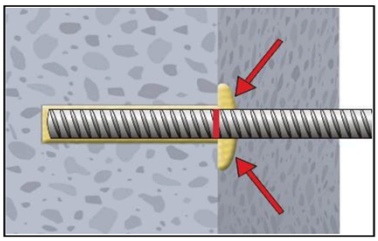

10. Annular gap between reinforcing bar and base material must be completely filled with mortar. Otherwise, the installation must be repeated starting from step 8 before the maximum working time t_{work} has expired.

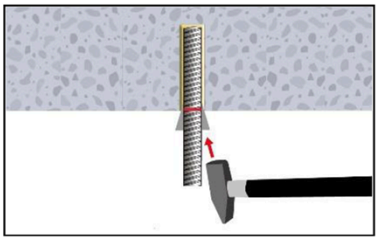

11. For application in vertical upwards direction the reinforcing bar shall be fixed (e.g. wedges).

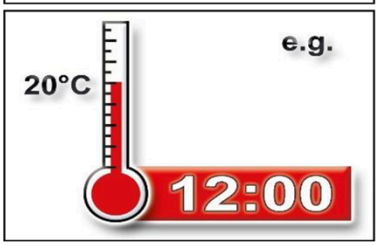

12. Temperature related curing time t_{cure} (Annex B 4) must be observed.
After initial curing time $t_{cure,ini}$ has elapsed, the installation of the connecting reinforcement and the formwork can be continued. The full load to the reinforcing bar may be applied after the full curing time t_{cure} has elapsed.

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection	**Annex B 9**
Intended use Installation instructions (continuation)	

Deutsches Institut für Bautechnik DIBt

Table C1: Characteristic resistance to tension load (static and quasi-static loading) for a working life of 50 and 100 years

Fastener			All sizes
Concrete cone failure			
Uncracked concrete	$k_{ucr,N}$	[-]	11,0
Cracked concrete	$k_{cr,N}$	[-]	7,7
Edge distance	$c_{cr,N}$	[mm]	1,5 l_b [1)]
Spacing	$s_{cr,N}$	[mm]	3,0 l_b [1)]

1) see Annex A 1

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection

Performances
Characteristic values of tension loads under static and quasi-static action for a working life of 50 and 100 years

Annex C 1

Deutsches Institut für Bautechnik DIBt

Table C2: Characteristic resistance to tension load under static and quasi-static loading in hammer drilled holes (HD), compressed air drilled holes (CD) and in hammer drilled holes with hollow drill bit (HDB); working life 50 and 100 years

Reinforcing bar					**Ø 8**	**Ø 10**	**Ø 12**	**Ø 14**	**Ø 16**	**Ø 20**	**Ø 24**	**Ø 25**	**Ø 28**	**Ø 32**	**Ø 36**	**Ø 40**
Combined pull-out and concrete failure; working life 50 and 100 years																
Characteristic resistance in uncracked concrete C20/25 in hammer drilled holes (HD) and compressed air drilled holes (CD)																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,ucr,50}$ = $\tau_{Rk,ucr,100}$	[N/mm²]	16	16	16	16	16	16	15	15	15	15	15	15
	II: 50°C/72°C				12	12	12	12	12	12	12	12	11	11	11	11
Characteristic resistance in uncracked concrete C20/25 in hammer drilled holes with hollow drill bit (HDB)																
Temperature range	I: 24°C/40°C	Dry, wet concrete	$\tau_{Rk,ucr,50}$ = $\tau_{Rk,ucr,100}$	[N/mm²]	14	14	13	13	13	13	13	13	13	13	1)	
	II: 50°C/72°C				12	12	12	11	11	11	11	11	11	11		
	I: 24°C/40°C	flooded bore hole			13	13	13	13	13	13	13	13	13	13		
	II: 50°C/72°C				11	11	11	11	11	11	11	11	11	11		
Reduction factor $\psi^0_{sus,50}$, $\psi^0_{sus,100}$ in cracked and uncracked concrete C20/25; (HD, CD and HDB)																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\psi^0_{sus,50}$ = $\psi^0_{sus,100}$	[-]	0,80											
	II: 50°C/72°C				0,68											
Increasing factors for concrete			ψ_c	[-]	$(f_{ck} / 20)^{0,1}$											
Characteristic bond resistance depending on the concrete strength class			$\tau_{Rk,ucr,50}$ =		$\psi_c \cdot \tau_{Rk,ucr,50,(C20/25)}$											
			$\tau_{Rk,ucr,100}$ =		$\psi_c \cdot \tau_{Rk,ucr,100,(C20/25)}$											
Influence of cracked concrete on combined pullout and concrete cone failure; working life of 50 and 100 years; (HD, CD and HDB)																
Factor for influence of cracked concrete	HD, CD		Ω_{cr}	[-]	0,84	0,84	0,85	0,86	0,87	0,89	0,91	0,91	0,92	0,94	0,94	0,95
	HDB				0,84	0,84	0,85	0,86	0,87	0,89	0,91	0,91	0,92	0,94	NDA[1)]	
Bond-splitting failure; working life 50 and 100 years; (HD, CD and HDB)																
Product basic factor			A_k	[-]	6,0											
Exponent for influence of…																
- concrete compressive strength			sp1	[-]	0,32											
- rebar diameter ϕ			sp2	[-]	0,60											
- concrete cover c_d			sp3	[-]	0,30											
- side concrete cover (c_{max} / c_d)			sp4	[-]	0,28											
- embedment length l_b			lb1	[-]	0,66											
Concrete cone failure																
Relevant parameter					see Table C1											
Installation factor; (HD, CD and HDB)																
for dry and wet concrete			γ_{inst}	[-]	1,0										1,2	
for flooded bore hole					1,2										1)	

[1)] no performance assessed

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection

Performances
Characteristic resistance to tension load under static and quasi-static loading; working life of 50 and 100 years; (HD, CD and HDB)

Annex C 2

Deutsches Institut für Bautechnik DIBt

Table C3: Characteristic resistance to tension load under static and quasi-static loading in diamond drilled holes (DD); working life 50 and 100 years

Reinforcing bar					**Ø 8**	**Ø 10**	**Ø 12**	**Ø 14**	**Ø 16**	**Ø 20**	**Ø 24**	**Ø 25**	**Ø 28**	**Ø 32**	**Ø 36**	**Ø 40**
Combined pull-out and concrete failure																
Characteristic resistance in uncracked concrete C20/25; working life 50 years																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,ucr,50}$	[N/mm²]	14	13	13	13	12	12	11	11	11	11	11	10
	II: 50°C/72°C				11	11	10	10	10	9,5	9,5	9,5	9,0	9,0	8,5	8,5
Reduction factor $\psi^0_{sus,50}$ in cracked and uncracked concrete C20/25; working life 50 years																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\psi^0_{sus,50}$	[-]	0,77											
	II: 50°C/72°C				0,72											
Characteristic resistance in uncracked concrete C20/25; working life 100 years																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\tau_{Rk,ucr,100}$	[N/mm²]	14	13	13	13	12	12	11	11	11	11	11	10
	II: 50°C/72°C				11	10	10	10	9,5	9,0	9,0	9,0	8,5	8,5	8,0	8,0
Reduction factor $\psi^0_{sus,100}$ in cracked and uncracked concrete C20/25; working life 100 years																
Temperature range	I: 24°C/40°C	Dry, wet concrete and flooded bore hole	$\psi^0_{sus,100}$	[-]	0,73											
	II: 50°C/72°C				0,70											
Increasing factors for concrete			ψ_c	[-]	$(f_{ck} / 20)^{0,2}$											
Characteristic bond resistance depending on the concrete strength class			$\tau_{Rk,ucr,50}$ =		$\psi_c \cdot \tau_{Rk,ucr,50,(C20/25)}$											
			$\tau_{Rk,ucr,100}$ =		$\psi_c \cdot \tau_{Rk,ucr,100,(C20/25)}$											
Influence of cracked concrete on combined pullout and concrete cone failure; working life 50 and 100 years																
Factor for influence of cracked concrete			Ω_{cr}	[-]	0,87	0,88	0,89	0,90	0,91	0,94	0,94	0,94	0,93	0,93	0,93	0,93
Bond-splitting failure; working life 50 and 100 years																
Product basic factor			A_k	[-]	5,9											
Exponent for influence of…																
- concrete compressive strength			sp1	[-]	0,28											
- rebar diameter ϕ			sp2	[-]	0,53											
- concrete cover c_d			sp3	[-]	0,36											
- side concrete cover (c_{max} / c_d)			sp4	[-]	0,29											
- embedment length l_b			lb1	[-]	0,65											
Concrete cone failure																
Relevant parameter					see Table C1											
Installation factor																
for dry and wet concrete			γ_{inst}	[-]	1,0											1,2
for flooded bore hole					1,2				1,4							1)

1) no performance assessed

Injection System EJOT MULTIFIX Epoxy / Sormat ITH Epoxy for rebar connection

Performances
Characteristic resistance to tension load under static and quasi-static loading; working life 50 and 100 years (DD)

Annex C 3